



**Carbon Steel**  
provides greater  
strength and  
hardness while  
minimizing wear  
in high usage  
applications.

**RoHS Compliant**  
**Zinc Clear Trivalent**  
finish provides  
resistance to  
corrosion and rust.

# BENT WIRE EYE BOLTS

DIAMETERS UP TO 1/2" • LENGTHS UP TO 8"

**IN STOCK! READY TO SHIP!**

Ideal for use in  
light-duty through-  
hole applications  
utilizing static loads  
as tie-downs, or to  
route wire, rope,  
chain, or cable. Also  
useful for hanging  
fixtures, anchoring  
light loads, and  
attaching wire rope  
to structures or  
equipment.




**ORDER NOW AT HUYETT.COM!**





## BENT WIRE EYE BOLTS

## TURNED




**Design:** Bent Wire  
**Process:** Turned  
**Threads:** RH/UNC  
**Material:** Low Carbon Steel  
**Finish:** Zinc Clear Trivalent  
**Nut:** Hex



ITEM NUMBER	SHANK DIAMETER (A)	SHANK LENGTH (B)	ID EYE (C)	OVERALL LENGTH (D)	THREAD LENGTH (T)	WORKING LOAD LIMIT	WEIGHT/PC. (Approx.)
BWT025-20-100-087ZP	1/4"	1"	1/2"	2"	7/8"	74 lbs.	.04 lbs.
BWT025-20-150-125ZP	1/4"	1-1/2"	1/2"	2-1/2"	1-1/4"	74 lbs.	.04 lbs.
BWT025-20-200-125ZP	1/4"	2"	1/2"	3"	1-1/4"	74 lbs.	.05 lbs.
BWT025-20-400-250ZP	1/4"	4"	1/2"	5"	2-1/2"	74 lbs.	.08 lbs.
BWT025-20-600-400ZP	1/4"	6"	1/2"	7"	4"	74 lbs.	.09 lbs.
BWT031-18-200-125ZP	5/16"	2"	5/8"	3-1/8"	1-1/4"	74 lbs.	.09 lbs.
BWT038-16-100-087ZP	3/8"	1"	3/4"	2-1/2"	7/8"	144 lbs.	.12 lbs.
BWT038-16-150-113ZP	3/8"	1-1/2"	3/4"	3"	1-1/8"	144 lbs.	.13 lbs.
BWT038-16-200-125ZP	3/8"	2"	3/4"	3-1/2"	1-1/4"	144 lbs.	.15 lbs.
BWT038-16-300-150ZP	3/8"	3"	3/4"	4-1/2"	1-1/2"	144 lbs.	.17 lbs.
BWT038-16-400-250ZP	3/8"	4"	3/4"	5-1/2"	2-1/2"	144 lbs.	.21 lbs.
BWT038-16-600-400ZP	3/8"	6"	3/4"	7-1/2"	4"	144 lbs.	.24 lbs.
BWT050-13-200-150ZP	1/2"	2"	1"	4"	1-1/2"	298 lbs.	.33 lbs.
BWT050-13-400-250ZP	1/2"	4"	1"	6"	2-1/2"	298 lbs.	.41 lbs.
BWT050-13-600-400ZP	1/2"	6"	1"	8"	4"	298 lbs.	.50 lbs.

Additional finishes available. Contact our friendly Sales Team for more information.

## PROPER INSTALLATION AND USE OF BENT WIRE EYE BOLTS

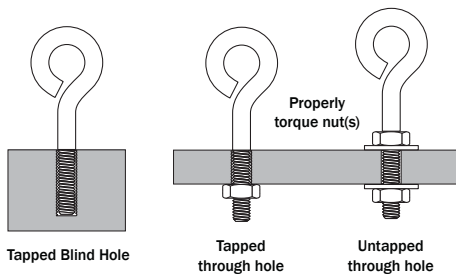

**Bent Wire Eye Bolts are intended for use with static loads only.**  
**Do Not Exceed Weight Load Limits!**

To prevent stretching, bending, or twisting that may result in the eye opening, never use bent wire eye bolts for pulling, lifting, or towing.

### Safety Precautions:

- Do not open the eye and bend back. This will weaken the eye bolt.
- Do not use eye bolts that have been machined or ground down.
- Do not use wrenches, bars, or grips to tighten eye bolts.
- Do not paint an eye bolt. Paint can cover up flaws.
- Do not force hooks or other fittings into the eye, they must fit freely.
- Do not shock load eye bolts. The increased force can cause system failure.
- Do not use eye bolts that have signs of wear or quality issues.

